GT-35-B BASS AMP

OWNER'S MANUAL

OVERVIEW

- 10" bass speaker
- RMS 35W / 4 Ohm
- 3-band EQ (low, mid, high)
- Aux input
- Line output
- Headphones output
- Built-in limiter
- Bright / boost switch

CAUTION

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. Do not remove cover. For service, refer to qualified service personnel.

The exclamation point within an equilateral triangle is intended to alert you to the presence of important operating and servicing instructions.

The lightning flash symbol within an equilateral triangles is intended to alert you to the presence of danger.

- Voltage: AC240V~50Hz

ATTENTION

- To avoid damage to the amplifier or other equipment, please turn down the level of all equipment and switch it off before connection. Turn the equipment on after connection and turn the level up gradually.
- The amplifier is equipped with a protective circuit, which will startup a few seconds after the amplifier is switched on.

FRONT PANEL

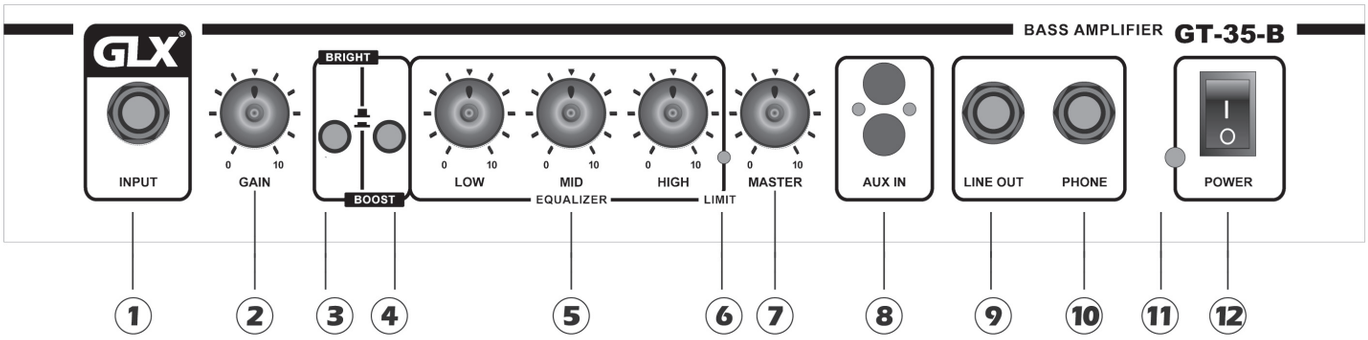

1. INPUT

(1/4") Use this jack to connect an electric bass guitar.

2. GAIN

Use this control to adjust the gain level.

3. BRIGHT

Use this control to boost the high frequency of your sound.

4. BOOST

Use this control to boost the low frequency of your sound.

5. LOW, MID, HIGH
Use these controls to boost or cut the low, mid and high frequency levels by ±12dB.

6. LIMIT LED
The built-in limiter limits harsh, transient peaks and evens out the bass guitar signal. The LED indicates when the limiter circuit is activated.

7. MASTER
Use this control to adjust the output level of the amplifier.

8. AUX IN (RCA)
Use this input to connect a CD-player, drum machine, etc.

9. LINE OUT (1/4”)
Use this jack to connect line output.

10. HEADPHONE OUTPUT (1/4”)
Use this jack to connect headphones.

11. POWER LED
This LED indicates when the amplifer is turned on.

12. POWER SWITCH
Use this switch to turn the amplifier on/off.

REAR PANEL

13. SOCKET

SPECIFICATIONS

Input sensitive / impedance:	-20dBu / 1MΩ (@1KHz)
Output (RMS):	35W / 4Ohm
Speaker:	1x10”
Connections:	input (1/4”) aux in (RCA) headphones (1/4”) line out (1/4”)
EQ:	3-band EQ: low, mid, high ±12dB
Power Supply:	240V~50Hz
Net weight:	14.5kg
Dimensions:	416x320x452mm

**** appearance and specifications are subject to change without notice – E&OE ****

GLX®
a division of galaxy industries