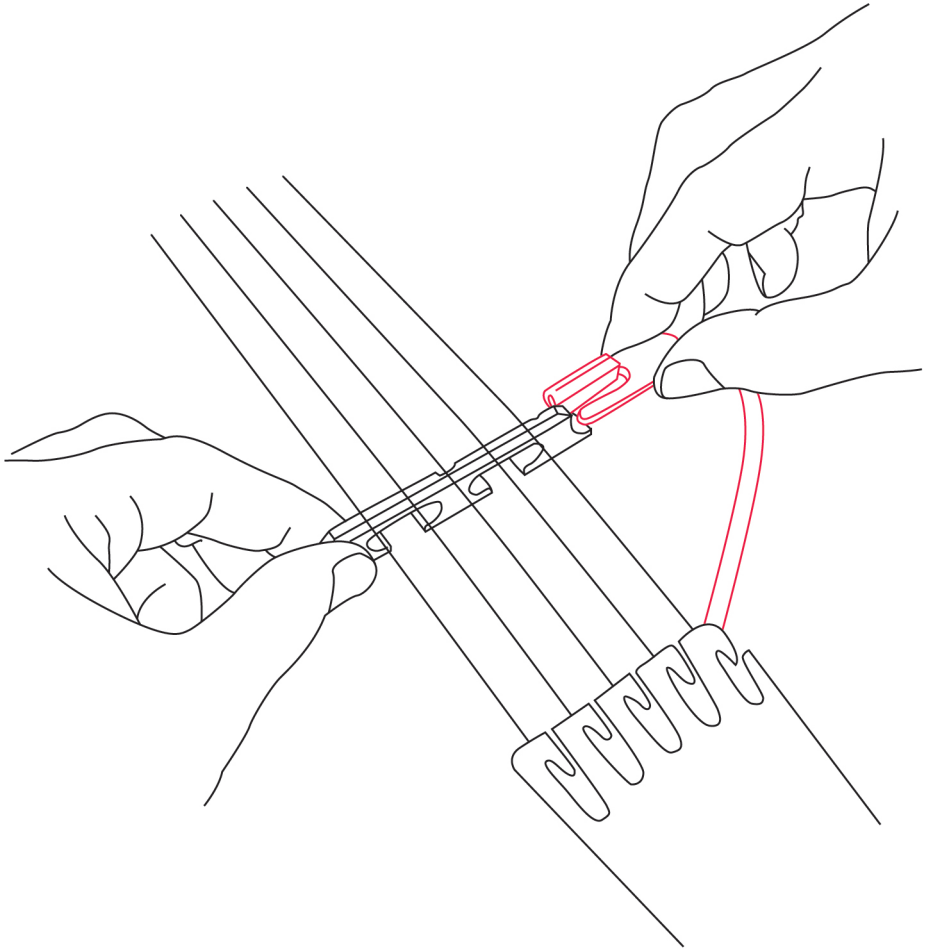

Hold the bridge with one hand while installing the BP-1 sensor. Slightly push against the microporous rubber sleeve and slip on the sensor.

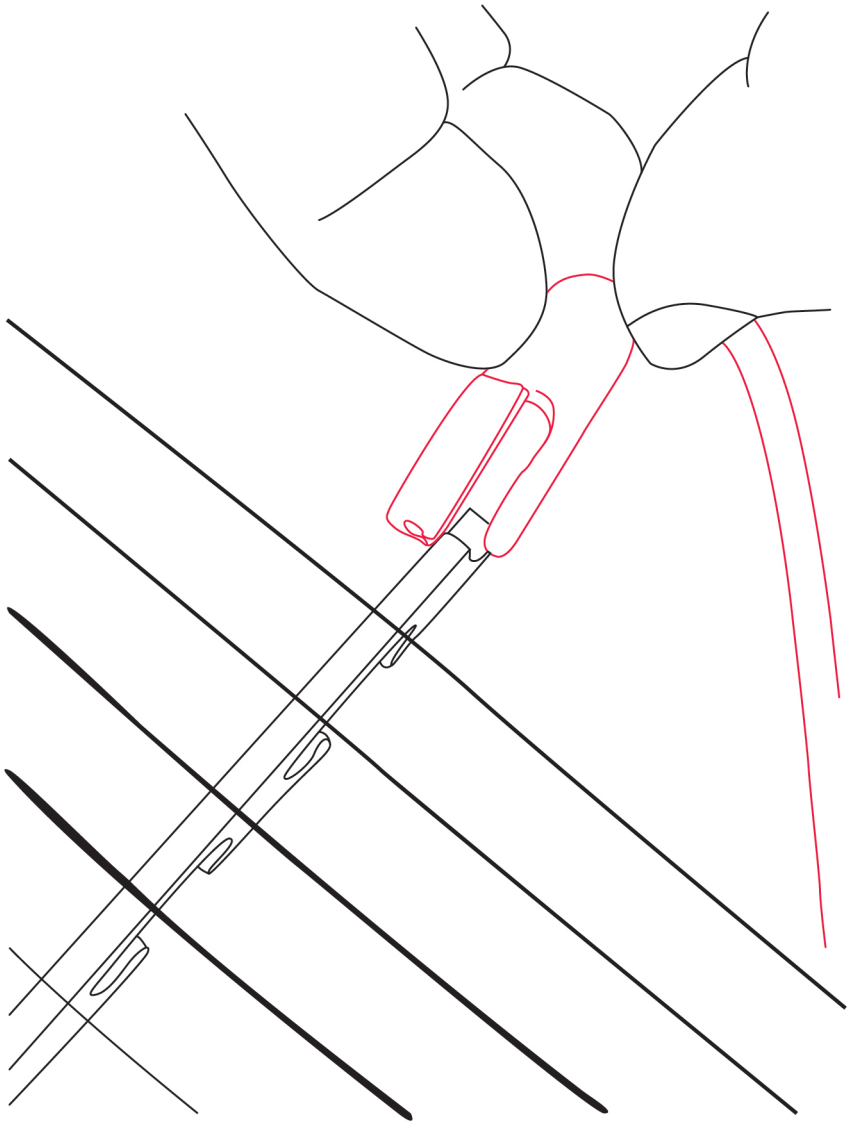

The sensor should first touch the bridge with its side where microporous sleeve is placed, lightly pressed on that side for the hole to open and then be inserted at all.

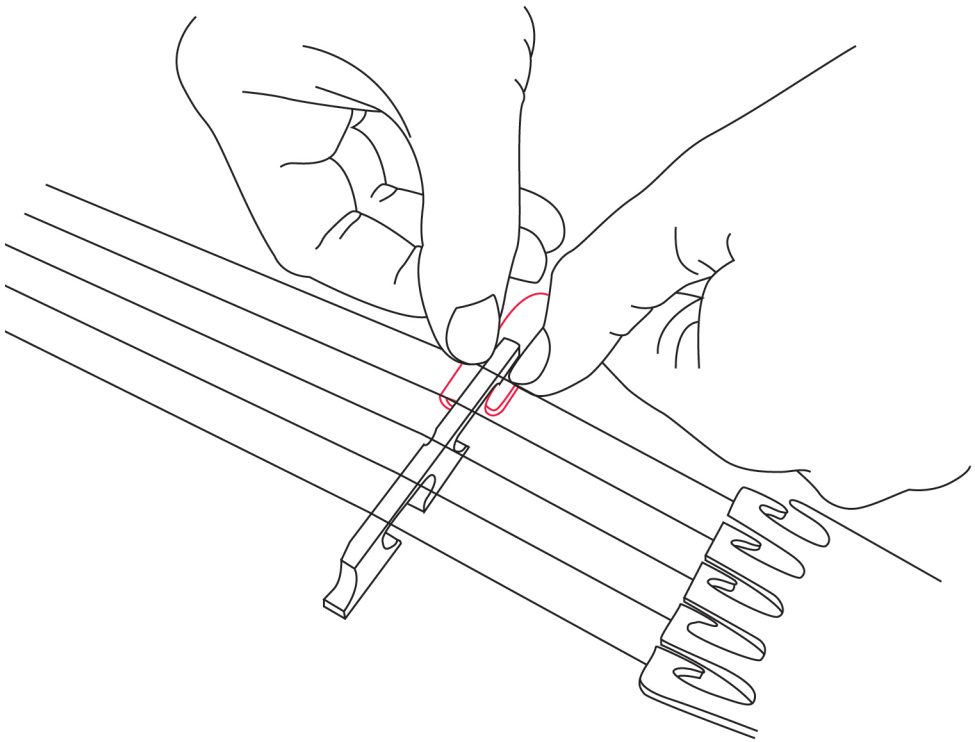

If needed, you may reposition the senor by placing your thumbs on each side and carefully sliding it down and away from the strings.

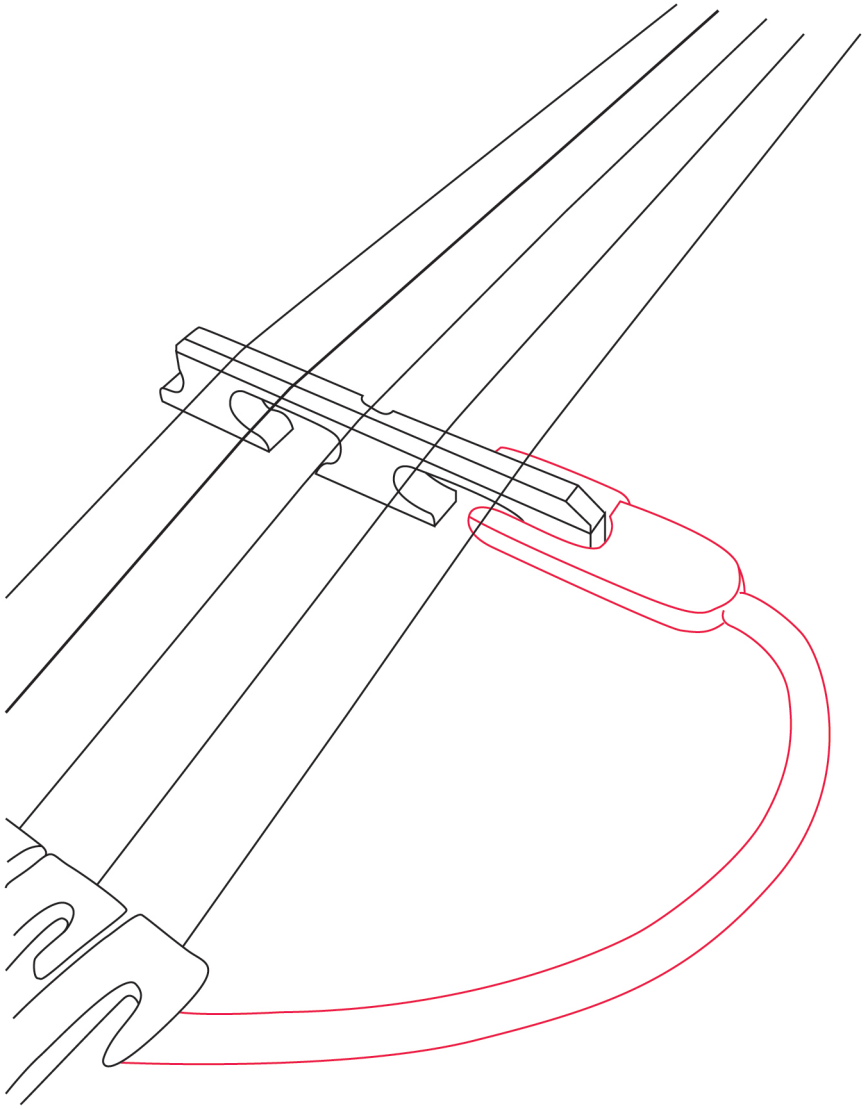

The sensor should fit tightly but install without force. it operates mounted from either side of the bridge.

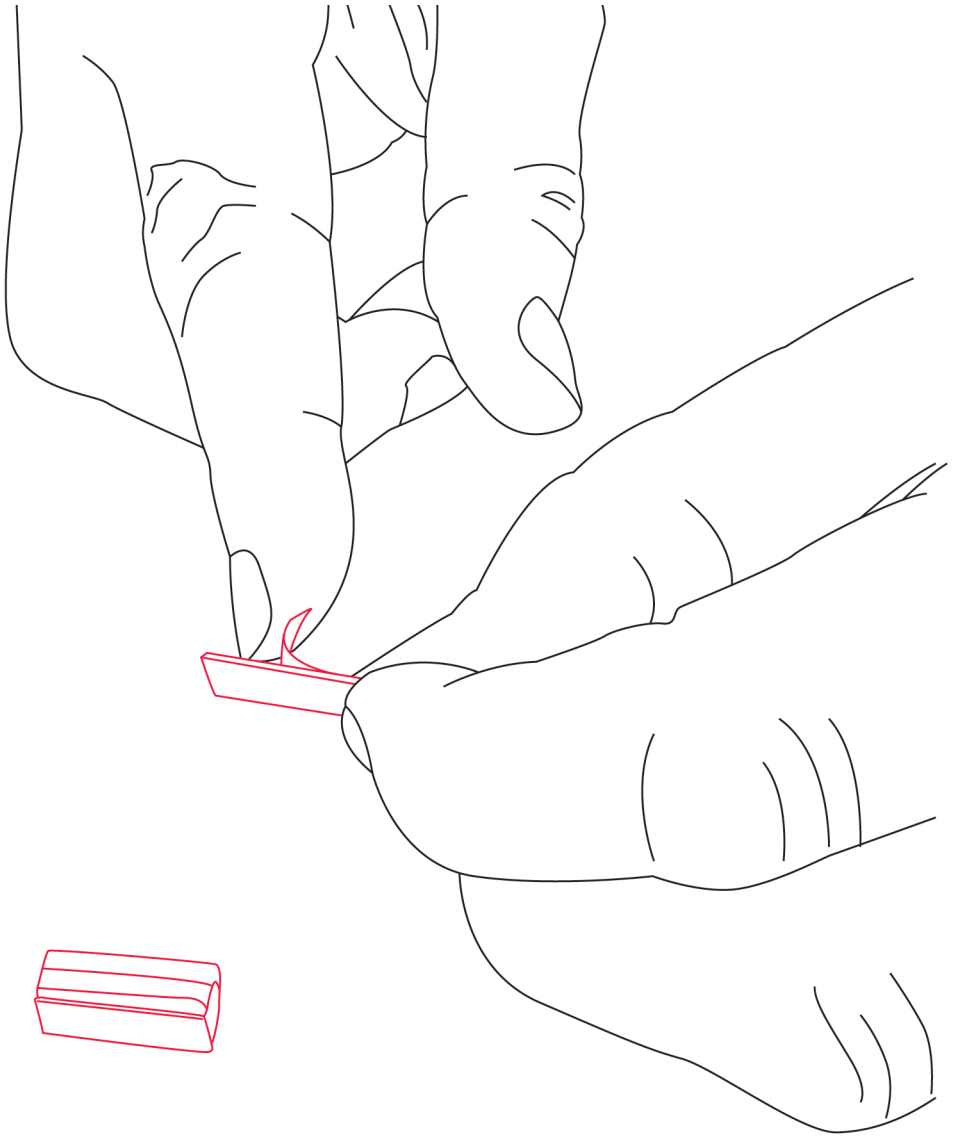

For a narrow banjo bridge, use the provided shims. Peel the protective film off to open the sticky side of the shims.

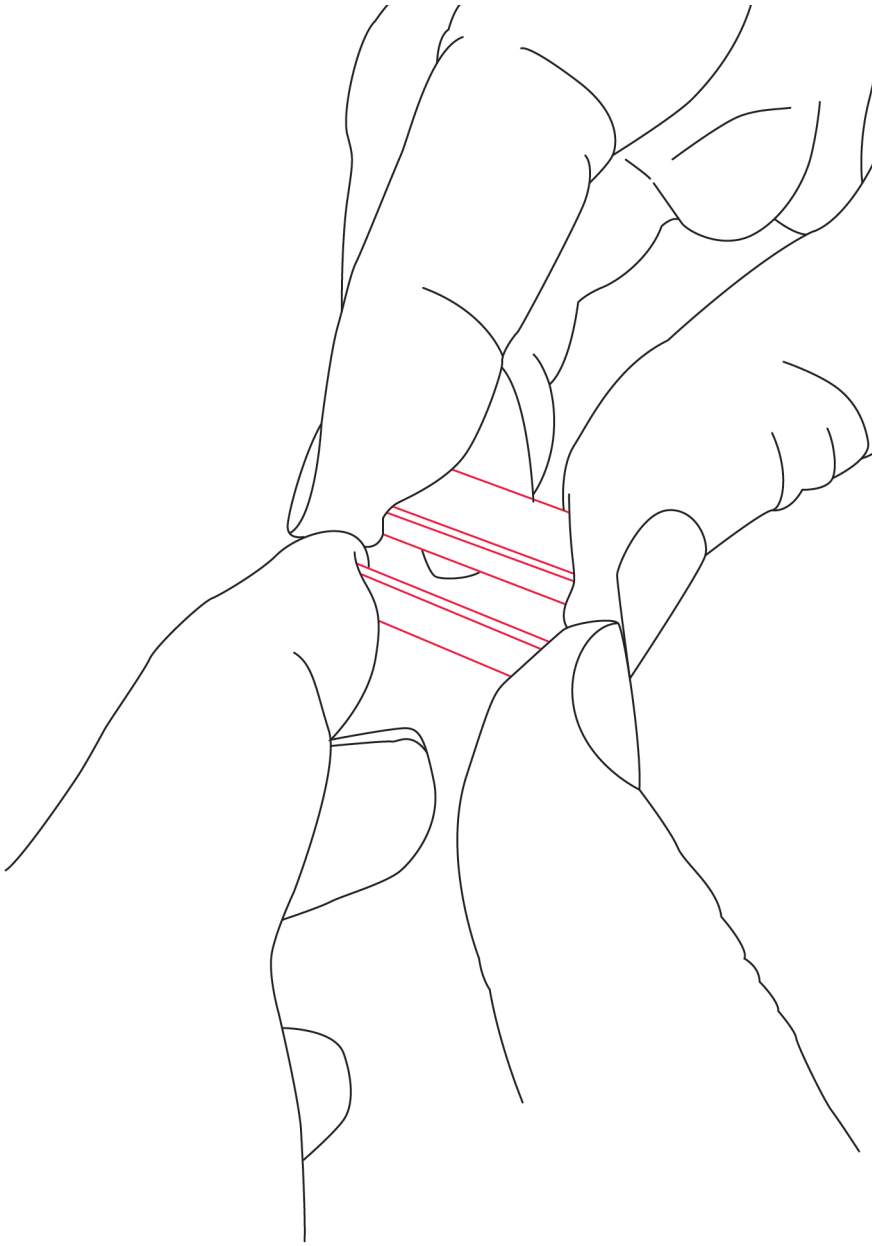

Install as many shims as needed over the wooden plate on the rubber sleeve. For your convenience, stick the shims on the rubber sleeve while it is removed from the sensor.

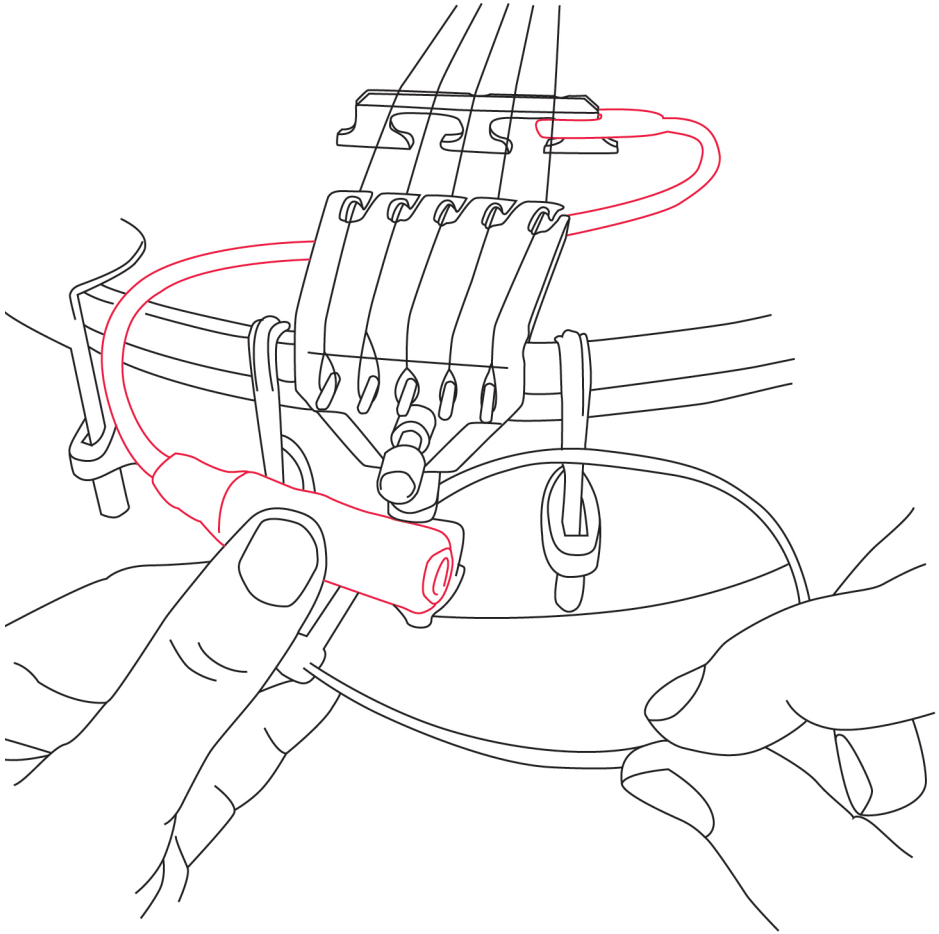

Find a suitable place for the jack housing somewhere next to the bracket hooks.

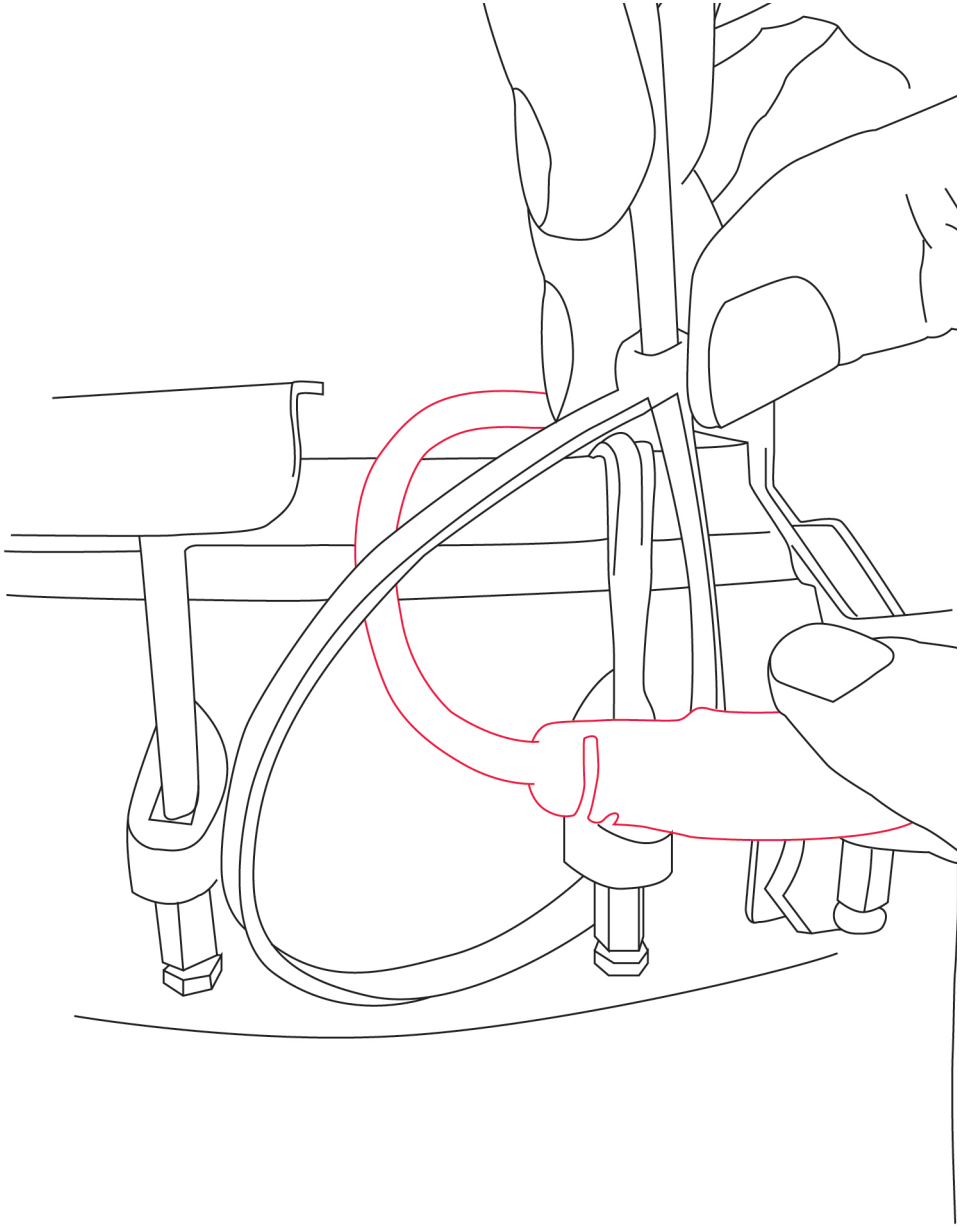

Use the included zip ties to attach the jack housing on the bracket hooks.

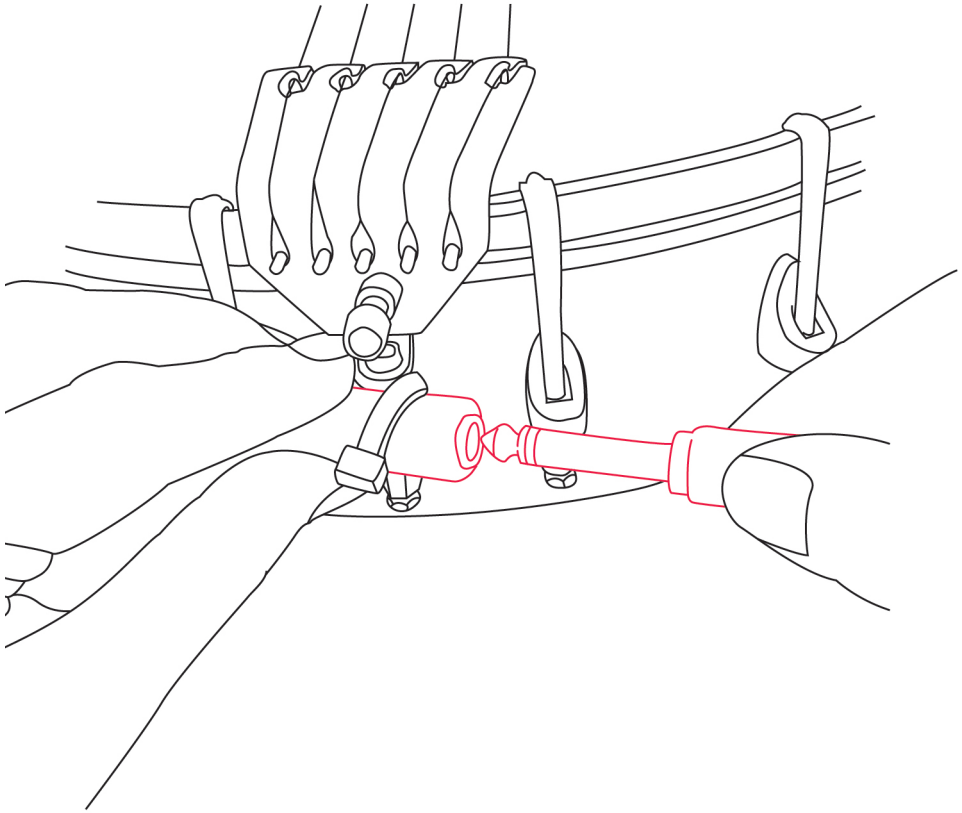

With the volume off, plug the cable between the BP-1 and your amplification system. Hold the jack housing firmly when attaching and detaching the cable.

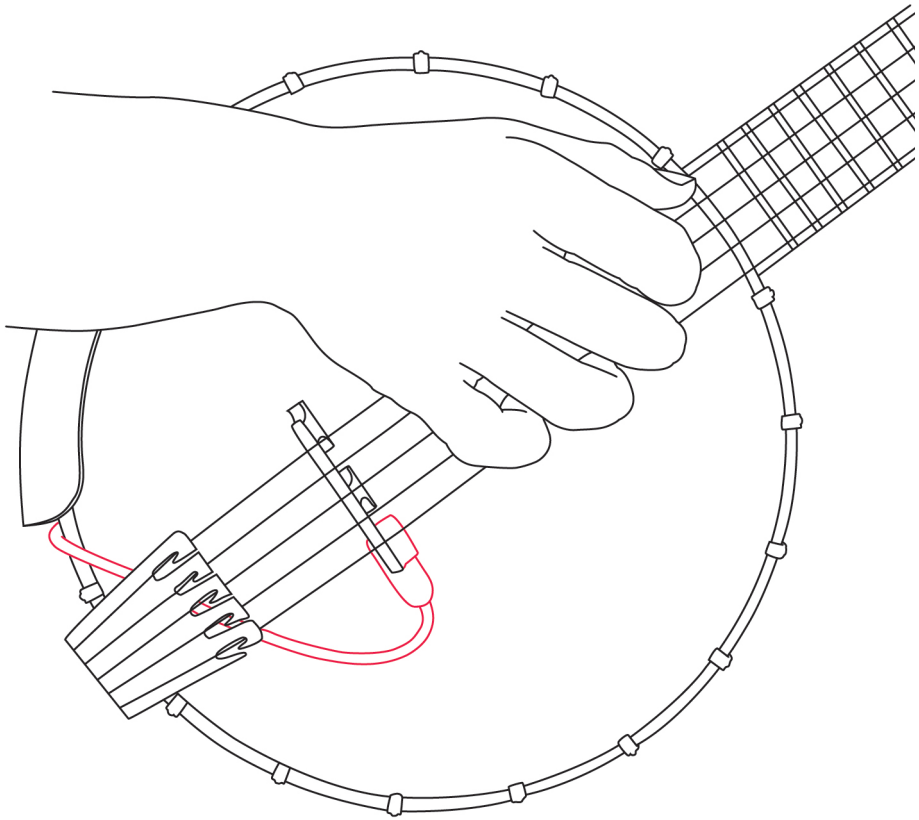

Enjoy your new pickup and make music!