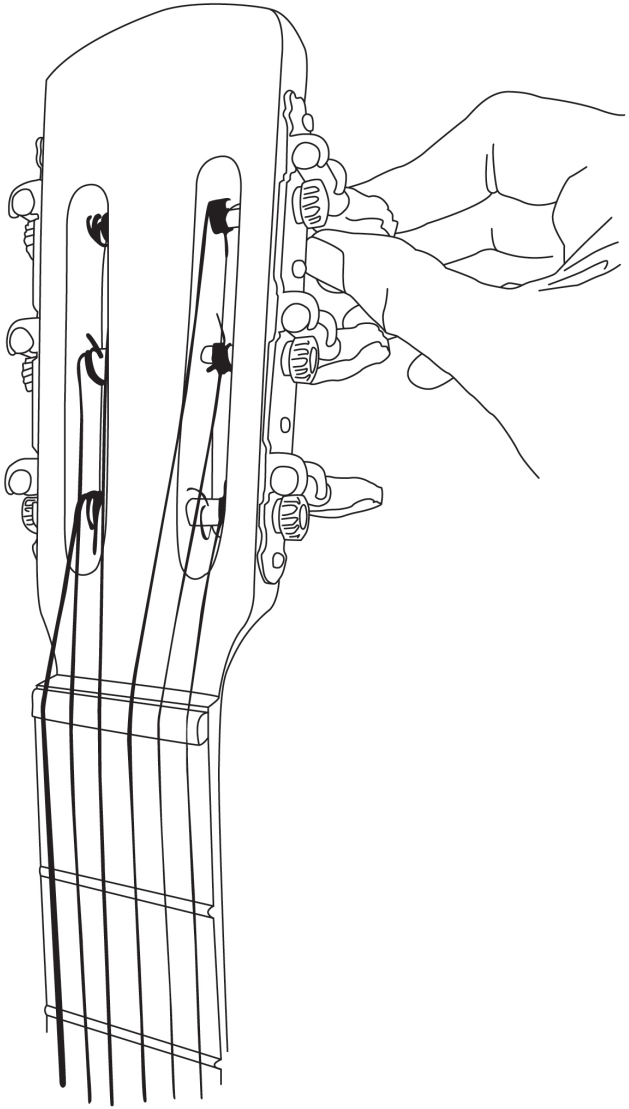

Loosen the strings of your guitar.

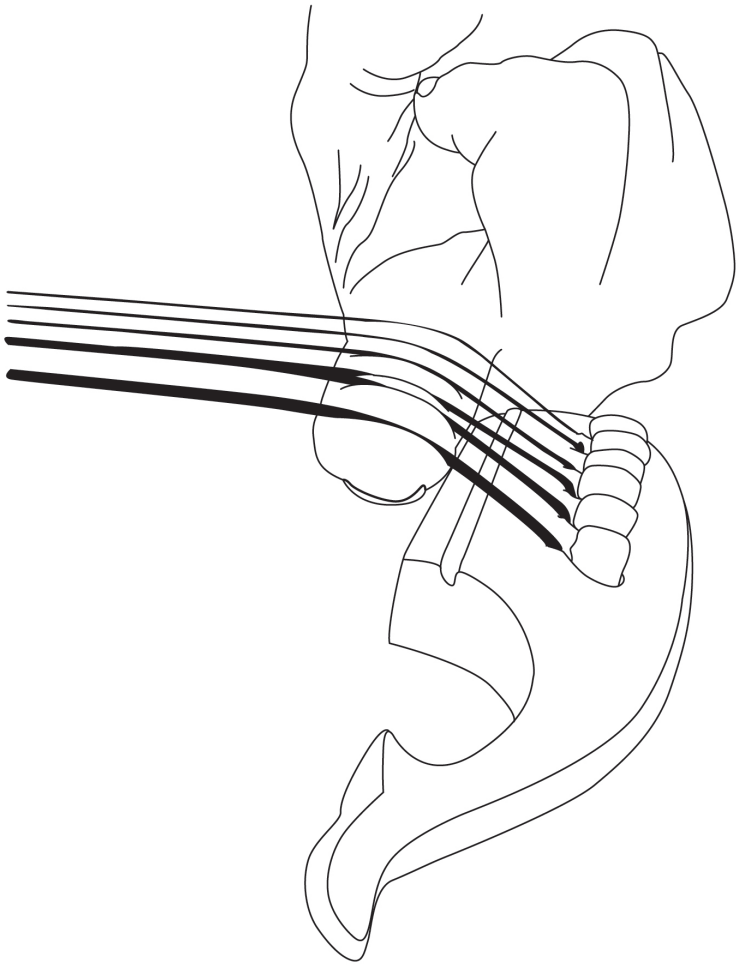

The pickup will be inserted between the bridge pins and the saddle. The bridge saddle should have a minimum of 2.5mm (0.098”) height on the treble side to allow room for pickup placement and for it to function properly.

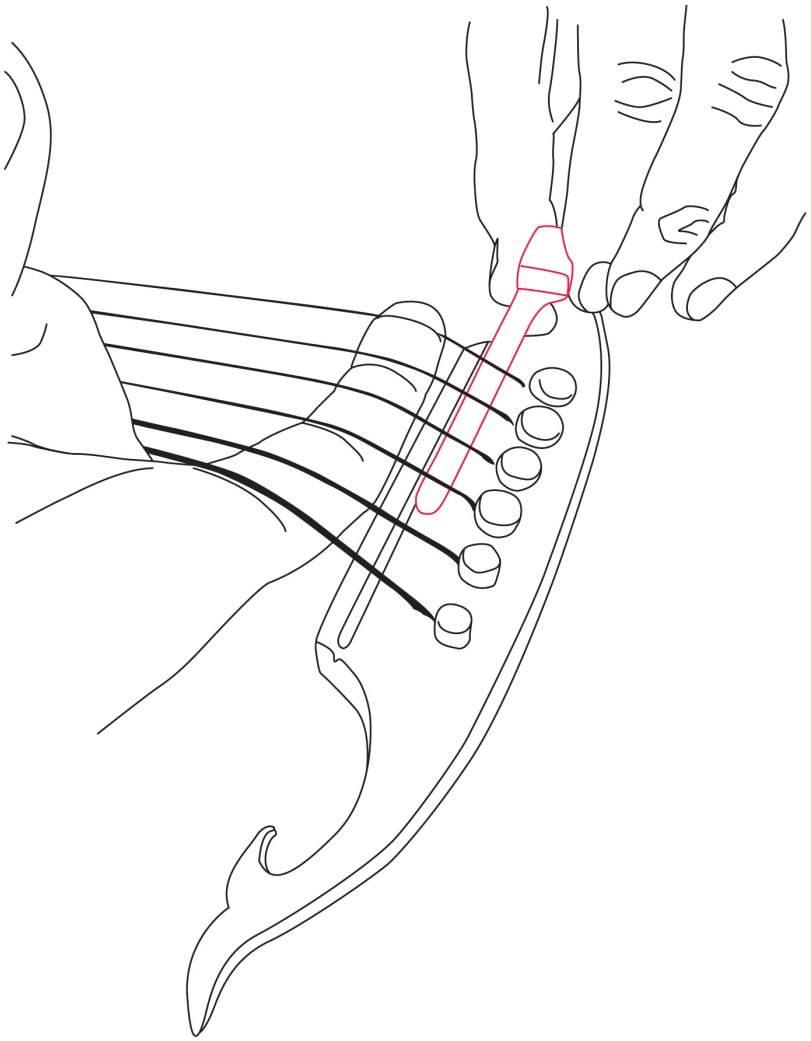

Starting with the narrow end, slide the pickup between the bridge pins and the saddle.

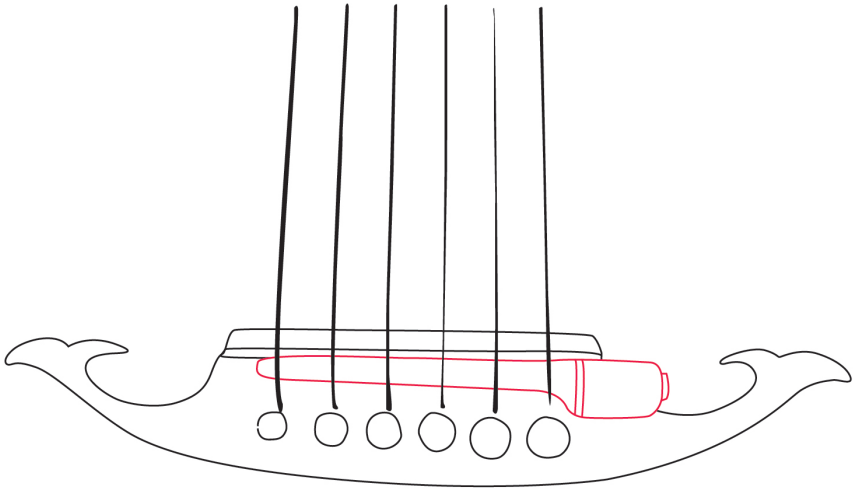

Move the pickup from the treble side up to the bass side until the end rests below the last string.

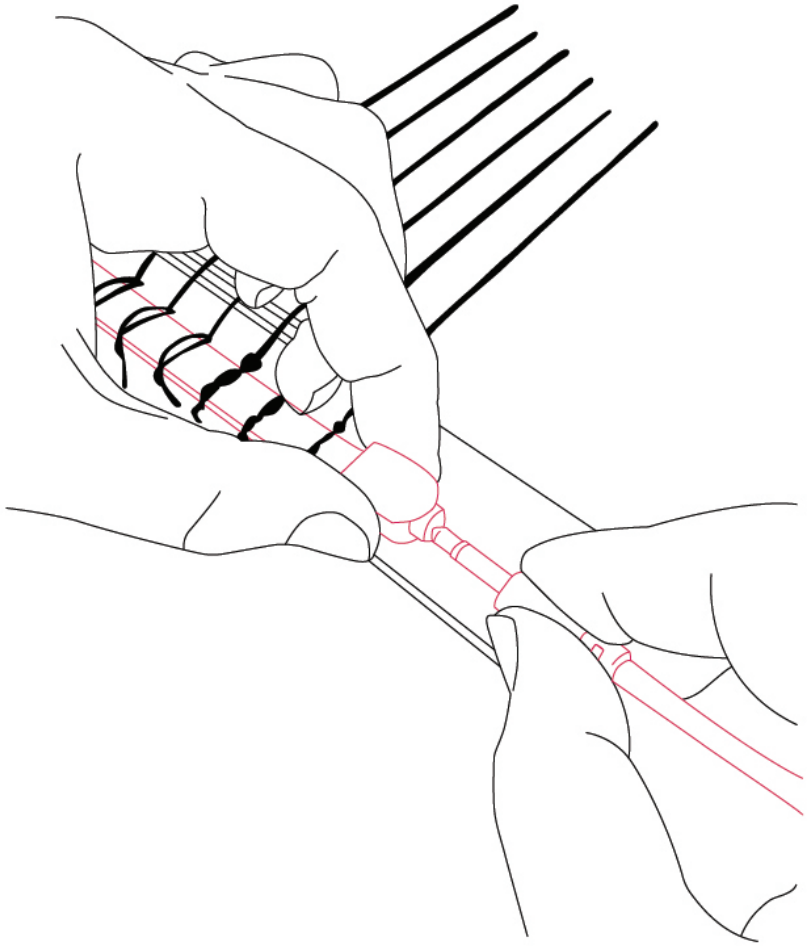

Hold the pickup head securely when attaching and detaching the 1/8” to 1/4” cable.

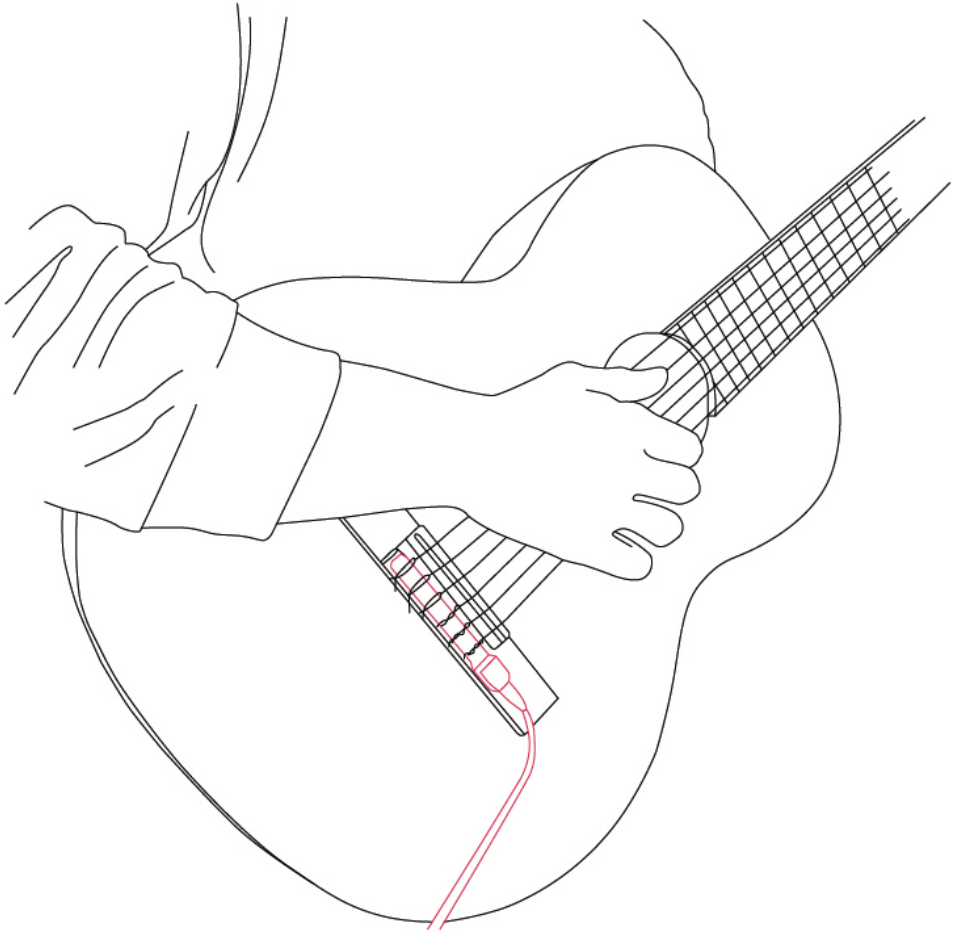

You are ready to enjoy your new pickup!