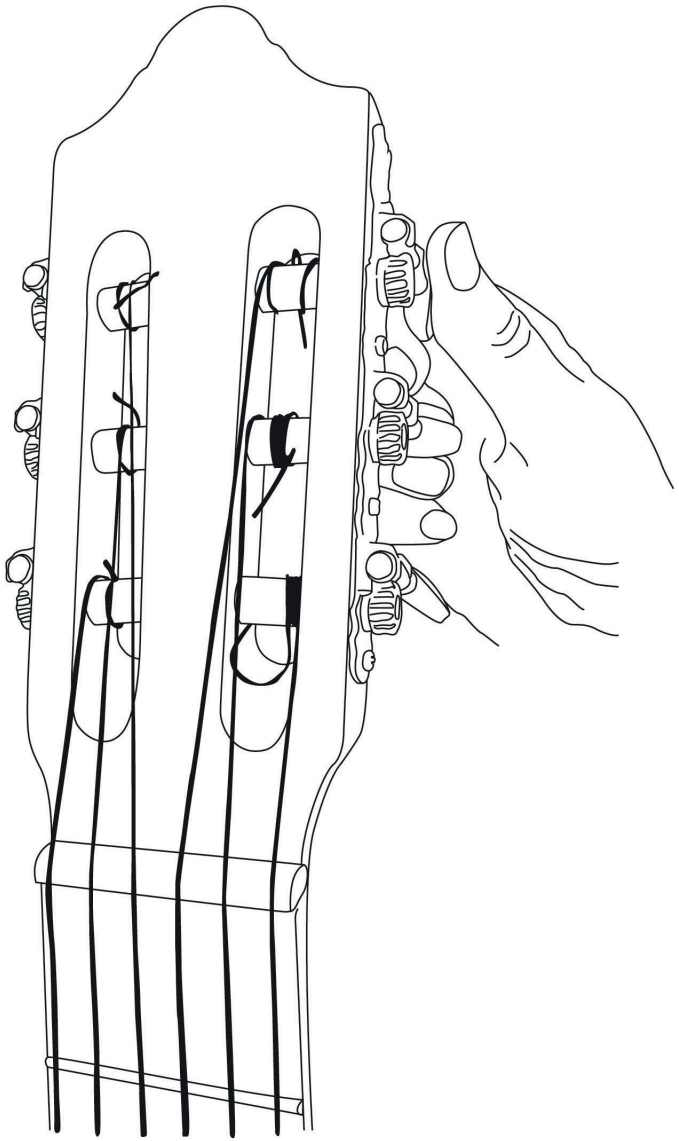

Loosen the strings of your guitar.

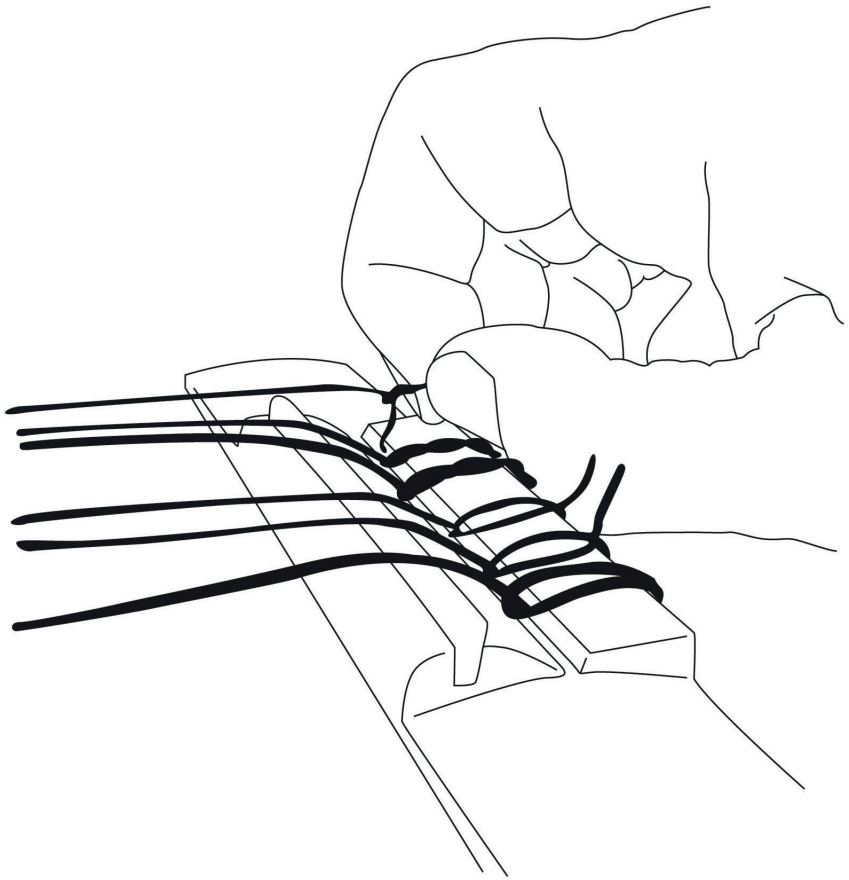

Make sure there is enough space under the loops so the pickup can slide through without any pressure.

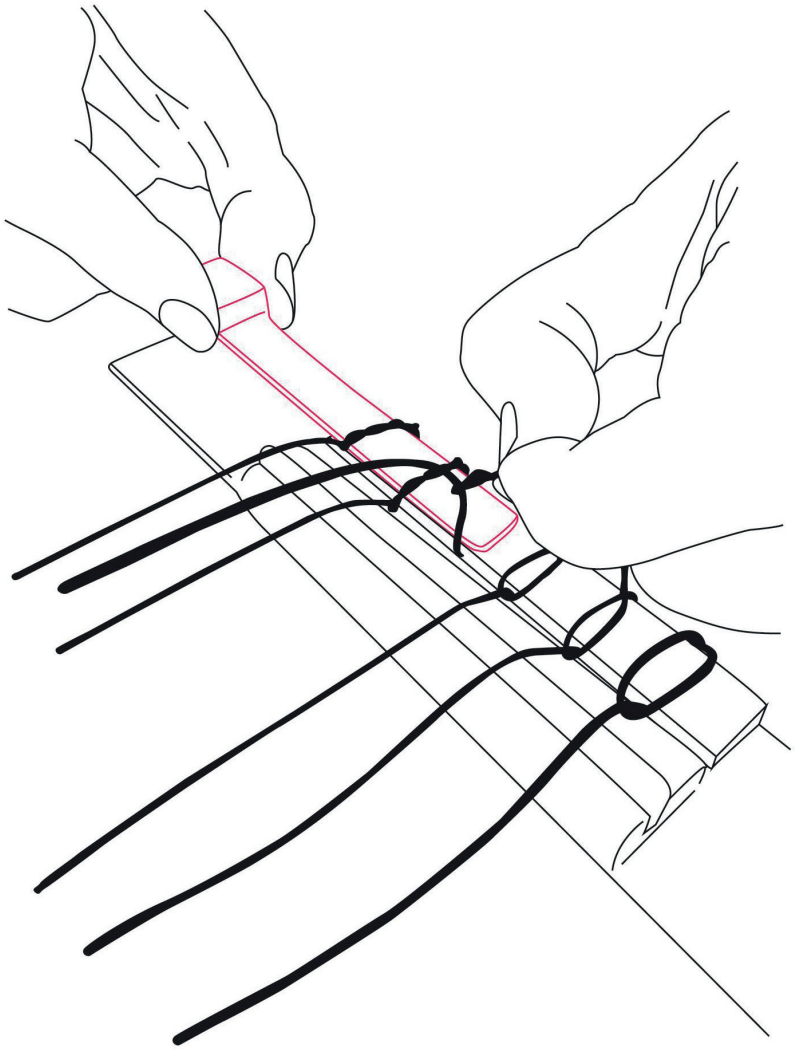

Slide the pickup under the string loops.

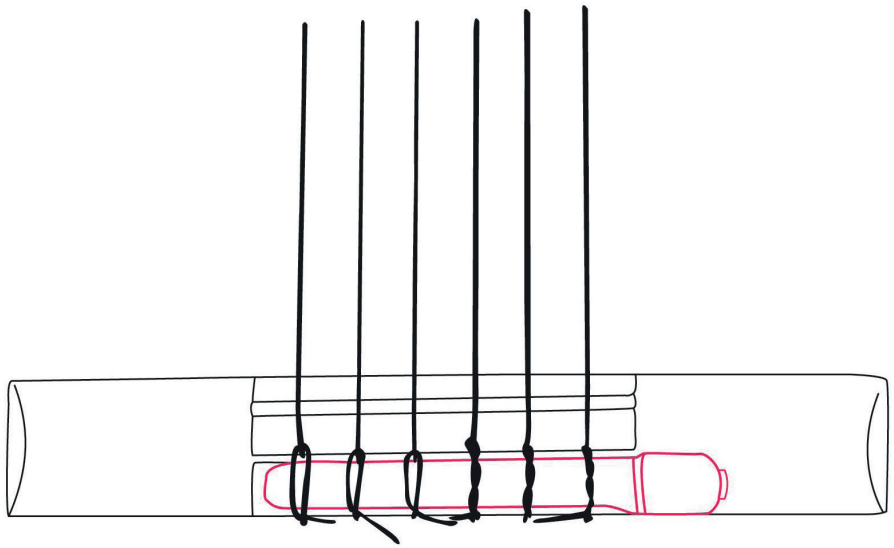

Keep it positioned evenly on the tie bar while tightening the strings and retune.

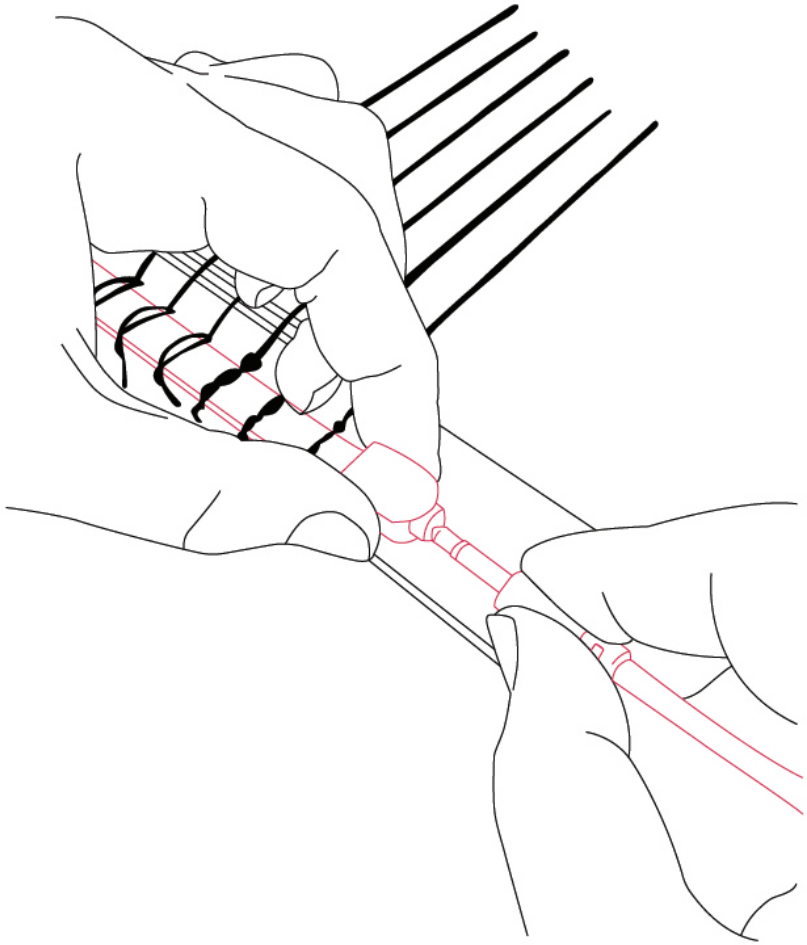

Hold the pickup head securely when attaching and detaching the 1/8” to 1/4” cable.

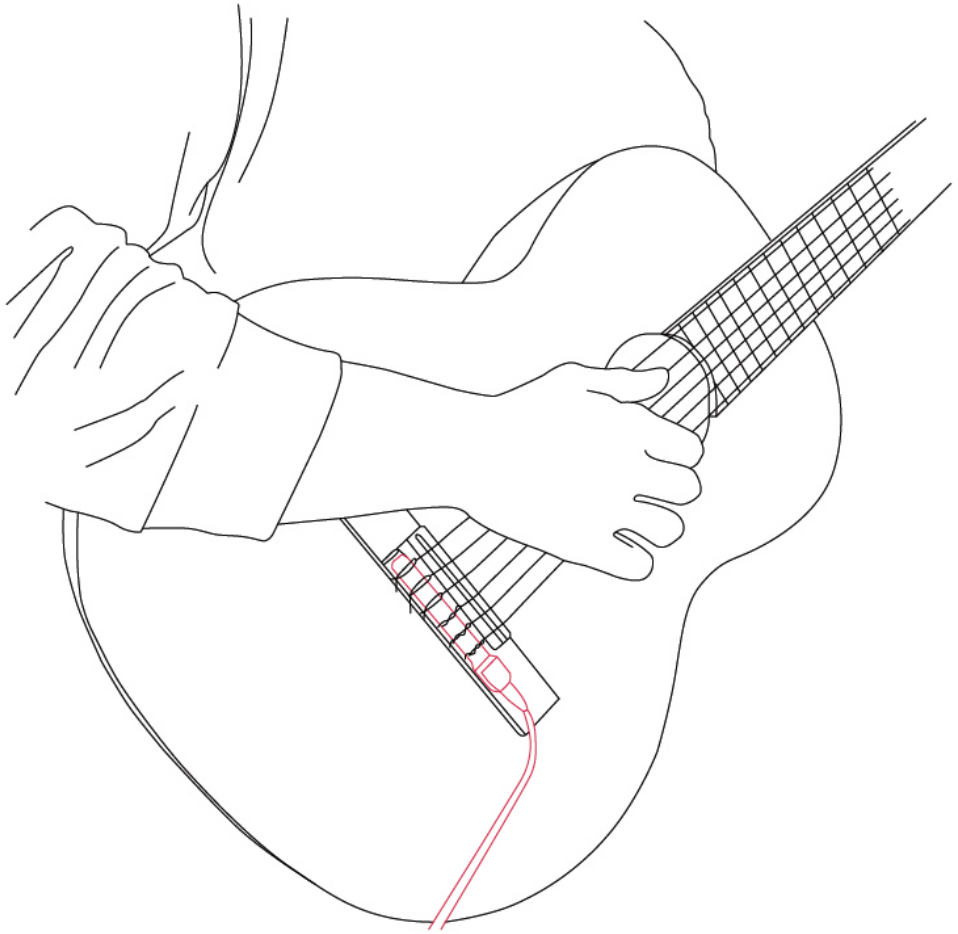

You are ready to enjoy your new pickup!